


**ROUNDABOUT CHEVRONS**

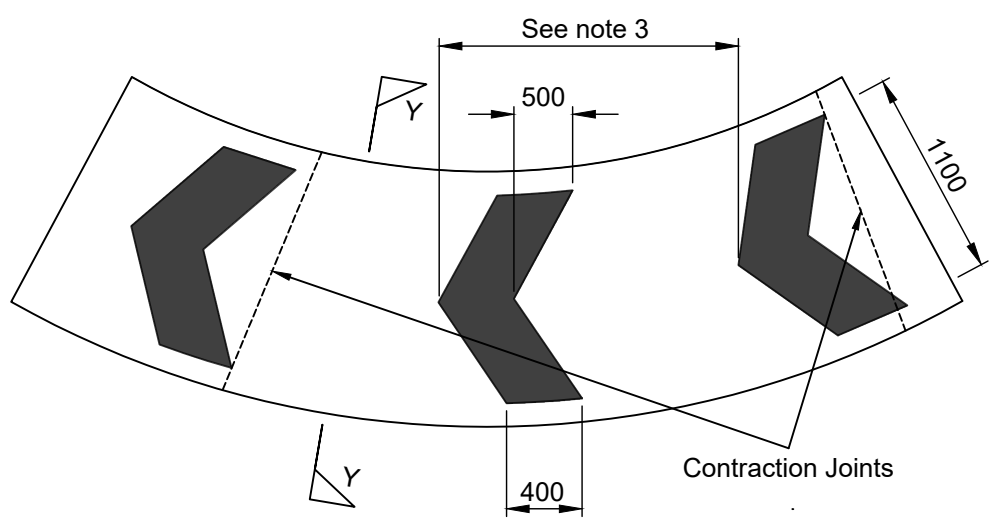


**ROUNDABOUT CHEVRONS**

**NOTES**


1. All dimensions in millimetres unless shown otherwise.
2. Blocks for roundabout to be 200x100x50mm with resin-bonded colour coatings in black and white (Marshalls "Keyblok" or equivalent)
3. The number of courses and the spacing between successive arrows is to be based on the table below. However the exact spacing between arrows shall be varied to give an even distribution of arrows around the circumference.

Diameter of Core	No. of Courses	Spacing Between Successive Arrows
Over 10m	11	1600mm
7 to 10m	9	1400mm
4 to 7m	7	1200mm

4. Block paving to be laid in stretcher bond parallel to kerb face.
5. Chevron pattern to diagram 515 (S2-6-3) Traffic Signs Manual Chapter 4.
6. For further information refer to Standard Detail Guidance Note drawing no. MKCC-100-001.

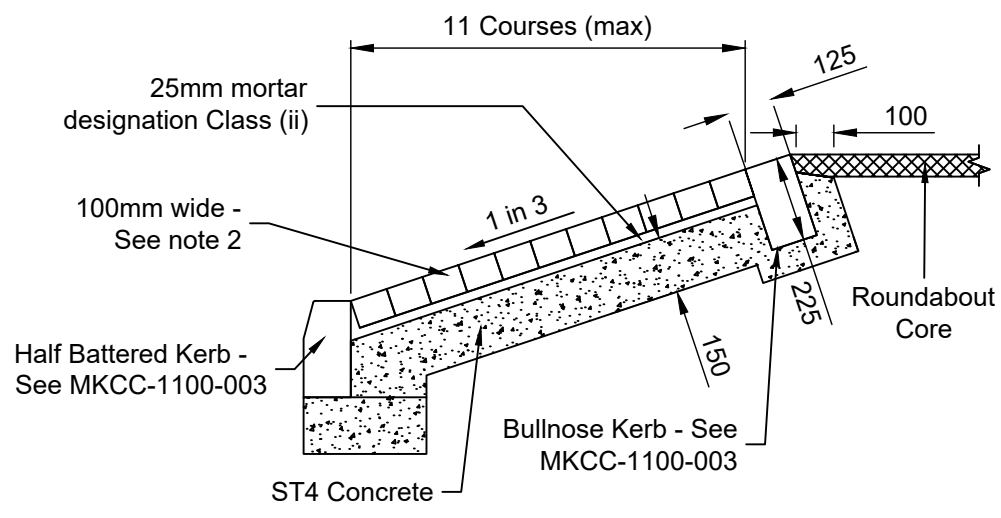

**SECTION X - X/  
BLOCKWORK OPTION**

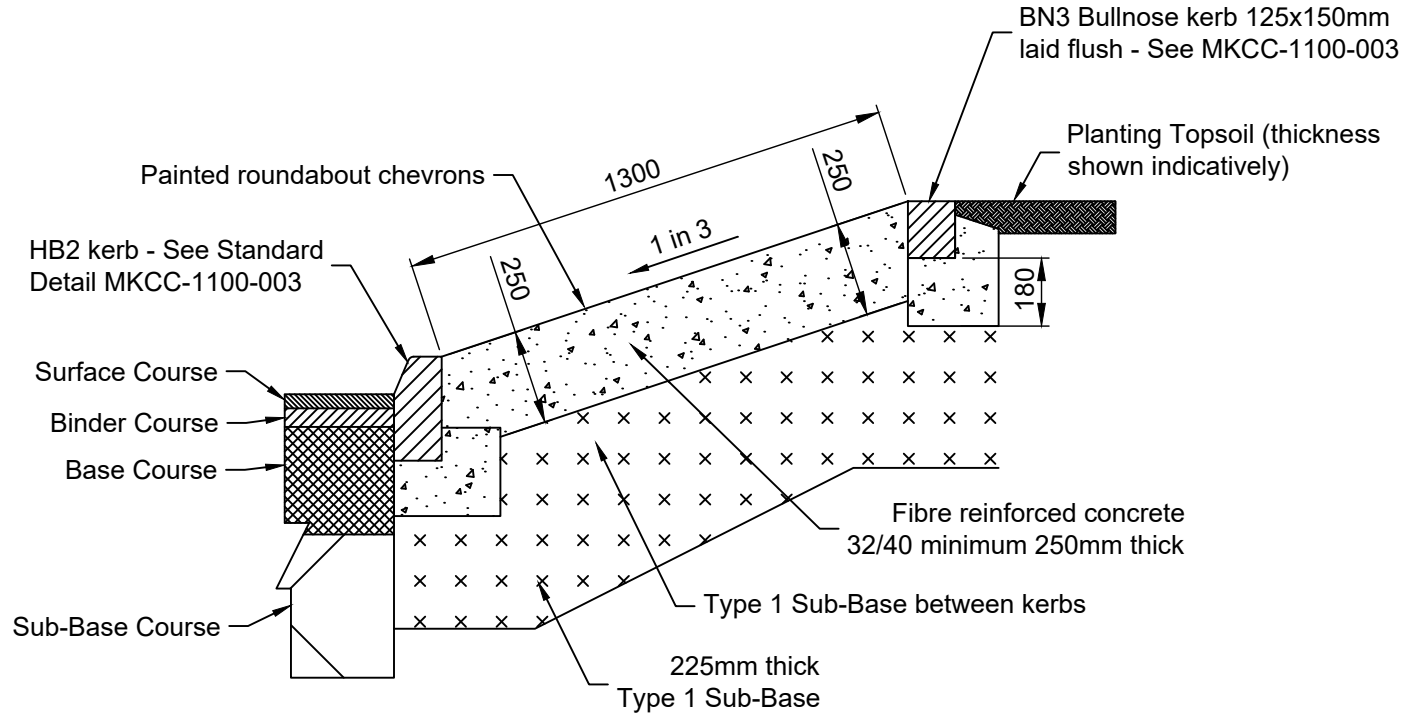

**SECTION Y-Y/ PAINTED  
OPTION (PREFERRED)**

**MK Milton Keynes City Council**  
Highways and Transportation  
Civic Offices  
1 Saxon Gate East  
Central Milton Keynes  
MK9 3EJ

<b>DRAWING TITLE:</b> Chevrons for Roundabouts												
<b>SCALE:</b> NTS	<b>REV:</b> P01	<b>DRAWN:</b> PG	<b>CHECKED:</b> JM	<b>APPROVED:</b> LS	<b>REV:</b>	<b>AMENDMENTS:</b>	<b>DRN:</b>	<b>CHCK'D:</b>	<b>APPR'D:</b>	<b>DATE:</b>		
		<b>INITIALS:</b>			<b>DRAWING NO:</b> MKCC-1100-010							
		<b>DATE:</b>	17/02/2026	17/03/2026	17/03/2026							

