0 100

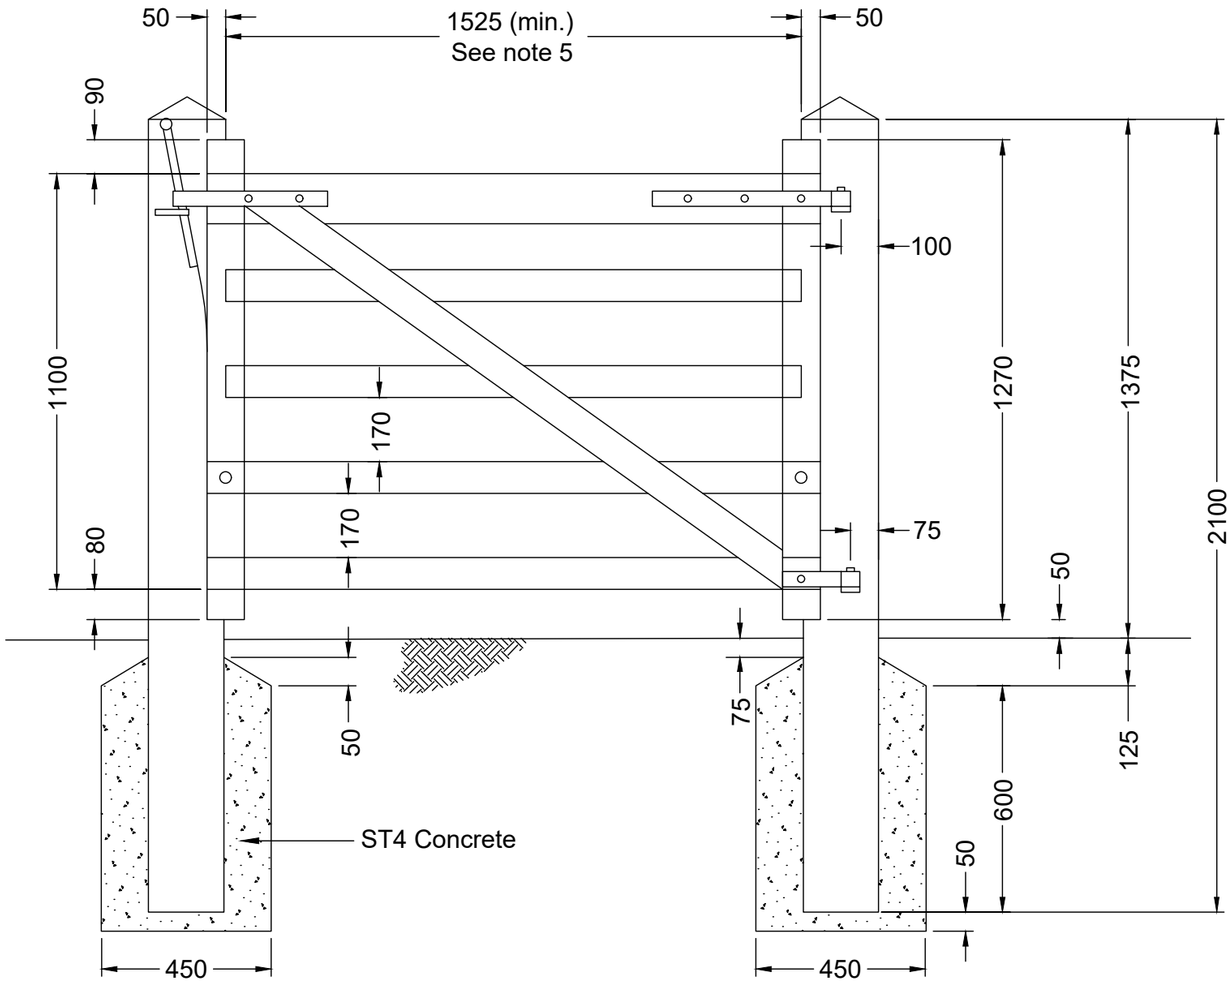

PEDESTRIAN/BRIDLE TIMBER FIELD GATE

Description of timber material	Size
Hanging Post	2100x200x200 Long
Shutting post	2100x175x175 Long
Hanging Stile	100x75
Shutting Stile	75x25
Top Rail	100x75 tapering to 75x75
Under Rails	75x25
Brace Housed in Top Rail	75x25

DIMENSIONS OF TIMBER MEMBERS

NOTES

1. All dimensions are in millimeters unless shown otherwise.
2. All gates shall open away from the highway.
3. For details of fittings for hanging and fastening see MCHW Highway Construction Details Drawing No. H30, H31 and H32.
4. For gates on PRoW, post footing material to be in accordance with BS.5709:2018.
5. Minimum width of gate on a footway is 1200mm and 1525mm on a bridleway.
6. All gate types to have latches that are easy to use, bridle gates to have latches that can be operated from horseback.
7. Gate and all associated supports and fixings are to comply with BS.1722.
8. All gates shall comply with BS 3470 & drop bolts shall be galvanised in accordance with BS EN ISO 1461:1999.
9. All gates through tenons shall be pegged with 13 diameter oak dowels.
10. For futher information refer to Standard Details Guidance Note drawing no. MKCC-100-001

Milton Keynes City Council

Highways and Transportation
Civic Offices
1 Saxon Gate East
Central Milton Keynes
MK9 3EJ

DRAWING TITLE: Pedestrian or Bridle Gate

REV:	AMENDMENTS:	DRN:	CHCK'D:	APPR'D:	DATE:
-	-	-	-	-	00/00/0000

SCALE:	REV:		DRAWN:	CHECKED:	APPROVED:
NTS	P01	INITIALS:	PG	JM	LS
		DATE:	17/02/2026	17/03/2026	17/03/2026

DRAWING NO: MKCC-300-006