0 100

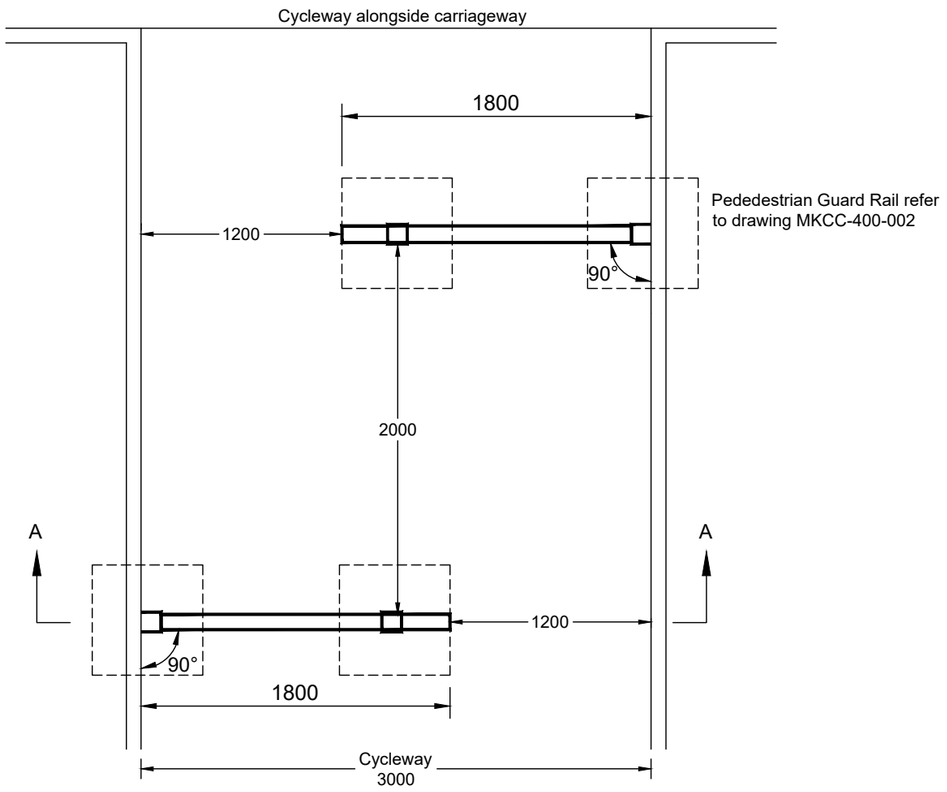

CYCLEWAY JOINING A ROAD AT RIGHT ANGLES

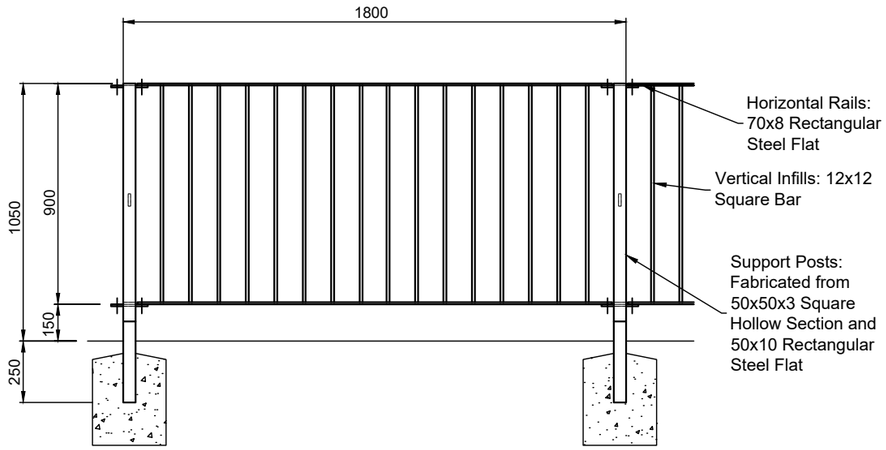

SECTION A-A

NOTES

1. All dimensions are in millimeters unless shown otherwise.
2. Barrier or guardrail to be constructed with medium series plain tube with a hot-dip zinc coating to BS EN 10255.
3. Fittings shall be cast iron and hot-dip galvanised.
4. Details show standard post foundations. Where a railing flange footing or grounded socket is specified the concrete shall be taken up to the finishes footway level. The surface of the concrete shall have a Class U2 finish.
5. Visrail guardrail to be used - see MKCC-400-002 for details.
6. For further information refer to Standard Details Guidance Note drawing no. MKCC-100-001.

Milton Keynes City Council

Highways and Transportation
Civic Offices
1 Saxon Gate East
Central Milton Keynes
MK9 3EJ

DRAWING TITLE: Staggered Cycleway Barrier

REV:	AMENDMENTS:	DRN:	CHCK'D:	APPR'D:	DATE:
-	-	-	-	-	00/00/0000

SCALE:	REV:		DRAWN:	CHECKED:	APPROVED:
NTS	P01	INITIALS:	AB	JM	LS
		DATE:	23/05/2025	17/03/2026	17/03/2026

DRAWING NO: MKCC-400-001