

◆ DAVID SMITH ASSOCIATES ◆ Consulting Structural & Civil Engineers ◆

♦ London **♦** Northampton **♦** Cirencester **♦** Birmingham **♦** www.dsagroup.co.uk

FLOOD INVESTIGATION REPORT

SHERINGTON

23rd DECEMBER 2020

Client: Lead Local Flood Authority

Milton Keynes Council

9 Dickens Road Old Wolverton Milton Keynes

Prepared By: Martin Andrews

Date: 30th August 2021

Reference: 21/42983/02

Revision: 01

VAT Registration No.: 670 8636 12

Eur Ing **David Smith** BSc(Hons), CEng, MICE, MIStructE, CMaPS, MFPWS, FCABE, ACIArb, **Hitesh Jethwa** BScEng(Hons), I.Eng, AMIStructE **Steven Ainge** BEng(Hons), IEng, AMIStructE **Richard Jones** HNC, MICE, Eng.Tech, **Thomas Garrod** B.Eng.(Hons), **Ben Mason** BSc (Hons), IEng, MICE





REVISION SCHEDULE

Milton Keynes Council Flood Investigation Report Sherington

David Smith Associates Reference: 21/42983/02

Rev	Date	Details	Author	Checked	Approved
01	23/06/21	Draft Report.	Martin Andrews (David Smith Associates)		
01	30/08/21	Final Issue	Martin Andrews (David Smith Associates)		

FOREWORD

One of the roles of Milton Keynes Council as the Lead Local Flood Authority (LLFA) is to carry out investigations into flooding incidents if they meet the set thresholds.

The LFFA will:

- Identify and explain the likely cause/s of flooding;
- Identify which authorities, communities and individuals have relevant flood risk management powers and responsibilities;
- Provide recommendations for each of those authorities, communities and individuals; and
- Outline whether those authorities, communities or individuals have or will exercise their powers or responsibilities in response to the flooding incident.

The LLFA cannot:

- Resolve the flooding issues or provide designed solutions; or
- Force Authorities to undertake any of the recommended actions.

CONTENTS

E	KECUTI	VE SUMMARY	6
1.	INT	RODUCTION	8
	1.1	Lead Local Flood Authority Investigation	8
	1.2	Method of Investigation	9
2.	RAI	NFALL ANALYSIS	10
3.	FLC	OODING HISTORY	12
	3.1	Previous Reports of Flooding	12
4.	LO	CATION OF FLOODING	12
	4.1	Location in Context	12
5.	DR	AINAGE SYSTEMS & WATERCOURSES	15
	5.1	Drainage Systems General	15
	5.2	Natural Watercourses	15
	5.3	Drainage Systems	16
	5.4	Flood Resilience	16
6.	DES	SCRIPTION OF FLOOD EVENT	17
	6.1	Rainfall and Flood Water	17
	6.2	Response to Flooding	18
7.	CO	NCLUSION	19
8.	REC	COMMENDATIONS	21
	8.1	General	21
	8.2	Communities	21
	8.3	Lead Local Flood Authority (LLFA)	22
	8.4	Highway Authority – Milton Keynes Highways	22
	8.5	Developers	23
	8.6	Environment Agency (EA)	23
9.	RIG	HTS AND RESPONSIBILITIES	23
	9.1	Communities	23
	9.2	Lead Local Flood Authority (LLFA)	23
	9.3	Highway Authority – Milton Keynes Council	24
	9.4	Water Company (Anglian Water) (AW)	24
	9.5	Land Owners and Developers	24
	9.6	Environment Agency (EA)	25
D	ISCLAII	MER	26
A	CRONY	'MS	27
U	SEFUL	LINKS	27
	CELIII	CONTACTS	20

Appendix A

Environment Agency Rainfall Catchment Analysis

Appendix B

Flood Incident Plan

Appendix C

Photographs

Appendix D

Drainage Project – Report By Resident

Appendix E

Environment Agency Standard Notice

EXECUTIVE SUMMARY

This Flood Investigation Report (FIR) has been completed by David Smith Associates on behalf of Milton Keynes Council (MKC) under its duties as the Lead Local Flood Authority (LLFA) in accordance with Section 19 of the Flood and Water Management Act 2010 (F&WMA).

Statutory Context

Section 19 of the F&WMA states that on becoming aware of a flood which meets certain predetermined criteria, the LLFA must undertake a formal flood investigation in order to determine the relevant flood risk management authorities involved and which flood risk management functions have been, or should be taken to mitigate future flood risk. Where an authority carries out an investigation it must publish the results.

Within the Milton Keynes Council 'Flood Investigation Protocol', the approved thresholds for undertaking a FIR are:

A formal flood investigation will be carried out if one or more of the following occurs:

- Flooding affecting critical infrastructure* for more than three hours from the onset of flooding;
- Internal flooding** of a building has been experienced on more than one occasion in the last five years; and/or
- Internal flooding of five buildings in close proximity*** has been experienced during a single flood incident.
- * Those infrastructure assets (physical or electronic) that are vital to the continued delivery and integrity of essential national services, the loss or compromise of which would lead to severe economic or social consequences, or to loss of life.
- ** A situation in which a building (commercial or residential) has been flooded internally, i.e. water has crossed the threshold and entered the building. This includes;
 - Basements and ground level floors of the building;
 - Garages/outbuildings if they are integral to the main occupied building. Garages adjacent or separate from the main occupied building are <u>not</u> included;
 - Occupied static caravans and park homes. Tents are <u>not</u> included.
- *** Where it is reasonable to assume that the affected properties were flooded from the same source, or interaction of sources, of flooding.

See over for additional notes

Notes:

- The LLFA will not investigate incidents of structural dampness or where basements are affected by groundwater entering through cracks in the basement walls or floor.
- In the event that the cause of, and the responsibility for addressing the flooding is well understood, no formal investigation will be undertaken.
- The LLFA will only undertake a flood investigation if the incident is formally reported within nine months of the flood event occurring.
- In addition to internal flooding of occupied buildings, affected properties shall also include those
 properties (commercial or residential) where water has entered gardens or surrounding areas which
 restricts access, or where flooding has disrupted essential services to the property such as sewerage
 or electricity supply. For businesses, this includes those where the flood waters are directly
 preventing normal trading practices.

Flooding Incident

It was deemed necessary to complete a formal investigation into the flood incident at Sherington that occurred on Wednesday 23rd December 2020. Internal flooding of a habitable garage and of the highway occurred.

Cause of Flooding

The flooding was caused by intense heavy rainfall over a relatively short period of time falling on to a near saturated or saturated catchment. The drainage infrastructure associated with High Street, was unable to accommodate the volume of surface water during this extreme event.

Main Conclusion

Following this report, the local community and relevant authorities must continue to work together, sharing information and reports, and consider implementing the key recommendations set out in Section 9 of this report.

Flooding in High Street and Gun lane occurred due to a lack of capacity within the highway and ditch drainage network associated with both roads.

Rainfall during the event may have been in excess of the capacity of the ditch and or highway drainage but both elements appear to be requiring maintenance to bring them up to full functionality.

1. <u>INTRODUCTION</u>

1.1 Lead Local Flood Authority Investigation

1.1.1 Purpose of Investigation

- 1.1.1.1 Section 19 of the Flood and Water Management Act (F&WMA) states:
 - (1) On becoming aware of a flood in its area, a Lead Local Flood Authority must, to the extent that it considers it necessary or appropriate, investigate:
 - a. which risk management authorities have relevant flood risk management functions, and
 - b. whether each of those risk management authorities has exercised, or is proposing to exercise, those functions in response to the flood.
 - (2) Where an authority carries out an investigation under subsection (1) it must:
 - a. publish the results of its investigation, and
 - b. notify any relevant risk management authorities.

Within the Milton Keynes Local Flood Risk Management Strategy the thresholds for undertaking a Formal Investigation Report have been determined as:

A formal flood investigation will be carried out if one or more of the following occurs:

- Flooding affecting critical infrastructure* for more than three hours from the onset of flooding;
- Internal flooding** of a building has been experienced on more than one occasion in the last five years; and/or
- Internal flooding of five buildings in close proximity*** has been experienced during a single flood incident.
- * Those infrastructure assets (physical or electronic) that are vital to the continued delivery and integrity of essential national services, the loss or compromise of which would lead to severe economic or social consequences, or to loss of life.
- ** A situation in which a building (commercial or residential) has been flooded internally, i.e. water has crossed the threshold and entered the building. This includes;
 - Basements and ground level floors of the building;
 - Garages/outbuildings if they are integral to the main occupied building. Garages adjacent or separate from the main occupied building are <u>not</u> included;
 - Occupied static caravans and park homes. Tents are <u>not</u> included.
- *** Where it is reasonable to assume that the affected properties were flooded from the same source, or interaction of sources, of flooding.

See over for additional notes

Notes:

- The LLFA will not investigate incidents of structural dampness or where basements are affected by groundwater entering through cracks in the basement walls or floor.
- In the event that the cause of, and the responsibility for addressing the flooding is well understood, no formal investigation will be undertaken.
- The LLFA will only undertake a flood investigation if the incident is formally reported within nine months of the flood event occurring.
- In addition to internal flooding of occupied buildings, affected properties shall also include those
 properties (commercial or residential) where water has entered gardens or surrounding areas which
 restricts access, or where flooding has disrupted essential services to the property such as sewerage
 or electricity supply. For businesses, this includes those where the flood waters are directly
 preventing normal trading practices.

1.1.2 Flood Incident

1.1.2.1 It was deemed necessary to complete a formal investigation into the flood incident at Sherington that occurred on Wednesday 23rd December 2020. Internal flooding of a habitable garage and of the highway occurred.

1.2 Method of Investigation

1.2.1 Information Provided

1.2.1.1 Milton Keynes Council (MKC) identified that a flood investigation was required in Sherrington. MKC provided details of the appropriate contact, details of the incident, details of drainage assets.

1.2.2 Site Meetings

- 1.2.2.1 A site visit to the area of flooding was carried out by the Investigating Officer at DSA on 26th April 2021. The meeting was held with the Chair of the Parish Council, and Councillor McLean.
- 1.2.2.2 The visit undertook a visual inspection of the general topography and relevant features within Sherington.
- 1.2.2.3 The site visit primarily looked at Gun Lane and High Street between Gun Lane and Water Lane.

2. RAINFALL ANALYSIS

2.1.1 Environment Agency Report

2.1.1.1 The Environment Agency have prepared a 'December 2020 Flooding Great Ouse Catchment' report which sets out the rainfall data in the lead up to and the subsequent river response. A copy of this document is enclosed in Appendix A.

Long Term Average (LTA) Rainfall

- 2.1.1.2 The Environment Agency data highlights that whilst November was relatively dry the LTA for the three months from October December were wet with rainfall reaching 154% of the LTA.
- 2.1.1.3 The Environment Agency say that:

"Over 2020, rainfall across the area was 115% of the LTA (Figure 1). The consistently above average rainfall in the months ahead of the main flood contributed to the catchment response on the 23rd December."

Soil Moisture Deficit (SMD)

2.1.1.4 On this the Environment Agency say:

"SMD is the difference between the amount of water actually in the soil and the amount of water the soil can hold, expressed in depth of water (mm). This is an indication of how saturated the ground is. A low SMD means heavy rainfall is less likely to infiltrate the ground and more likely to run off into watercourses. The impact of the excess rainfall shown in Figure 1 was an average SMD across the East of 3mm at the end of December. Statistically this is 'below normal' and an indication of how wet the catchment was."

Event Rainfall

2.1.1.5 On this the Environment Agency say:

"Up to 17mm fell across the catchment in the 3 days prior to the flood event, this filled the majority of remaining storage space, effectively saturating the catchment ahead of Storm Bella arriving on Wednesday 23rd December.

Figure 2 indicates the distribution of rainfall which fell across the Great Ouse catchment on December 23rd 2020, along with spot totals. Much of the rainfall was in the afternoon of the 23rd, rather than over the course of the day. This intensity of rainfall contributed to the fast reaction of watercourses. The December LTA of 55mm shows that almost a month's rainfall was seen in certain locations on the 23rd."

Site Specific Analysis

- 2.1.1.6 The nearest rainfall gauge to the site at Olney recorded 26mm of rainfall on the 23rd December. Based on a catchment average LTA of 55mm this equates to approximately 50% of a month's rain falling within a short period of time on a catchment which was either fully saturated or close to saturation. The rain gauge recorded peak rainfall intensities of nearly 15mm / hour.
- 2.1.1.7 Local variations in rainfall could mean that actual rainfall intensities at Sherington could be different.
- 2.1.1.8 The saturated or near saturated nature of the catchment would mean that there was very limited scope for water to infiltrate into the ground. Hence, the rate at which the water reached the watercourse would be much faster than for an unsaturated catchment.

3. **FLOODING HISTORY**

3.1 Previous Reports of Flooding

3.1.1.1 The following table lists flooding incidents that have been recorded in the area of the flood incident:

Date	Details	
January 2021	Similar flooding to that described in this report occurred again after the event.	
Various	A property on The Knoll is understood to have up to three times previously including during the 1990's.	

4. LOCATION OF FLOODING

4.1 Location in Context


4.1.1 Catchment Area

- 4.1.1.1 Sherington is located approximately 8.5km north east of Milton Keynes and 5km south of Olney. Land to the north and east of Sherington is generally higher. Sherington has several smaller unmapped watercourses which ultimately drain into the Great Ouse located to the south west typically via Water Lane or Sherington Road.
- 4.1.1.2 The majority of flooding on the day of the event occurred along High Street, which is orientated in a north / south direction as such falls from the north with higher land to the south towards the centre of Sherington.
- 4.1.1.3 Upstream of Sherington the High Street catchment serves an area of approximately 1.38km². The upstream catchment comprises predominately agricultural land.
- 4.1.1.4 Flooding also occurred along Gun Lane which crosses a valley. The valley is falling from east to west towards the High Street and has its own watercourse.
- 4.1.1.5 The context of Sherington within the wider catchment is shown on the drawing enclosed in Appendix B.

4.1.2 Long Term Flood Risk Mapping


- 4.1.2.1 Long Term Flood Risk Mapping has been obtained from https://flood-map-for-planning.service.gov.uk/ and https://flood-warning-information.service.gov.uk/long-term-flood-risk/map
- 4.1.2.2 The maps are intended for guidance and cannot provide details for individual properties. The maps have been produced by the Environment Agency.
- 4.1.2.3 No flooding is shown on the fluvial flood map, this may or may not be accurate as the Environment Agency doesn't provide fluvial data for the smallest of watercourses.

4.1.2.5 Flood Risk from Surface Water

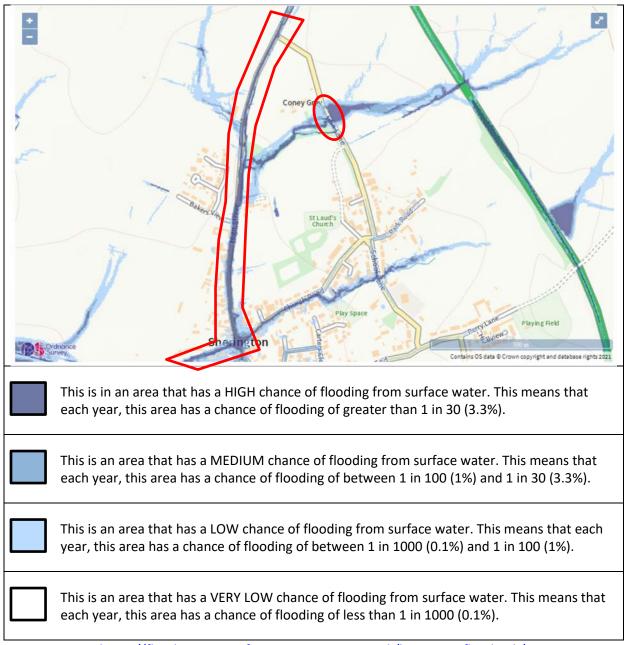

Source: https://flood-warning-information.service.gov.uk/long-term-flood-risk/map
© Environment Agency copyright and database rights 2021

4.1.2.6 Flood Risk from Rivers or the Sea

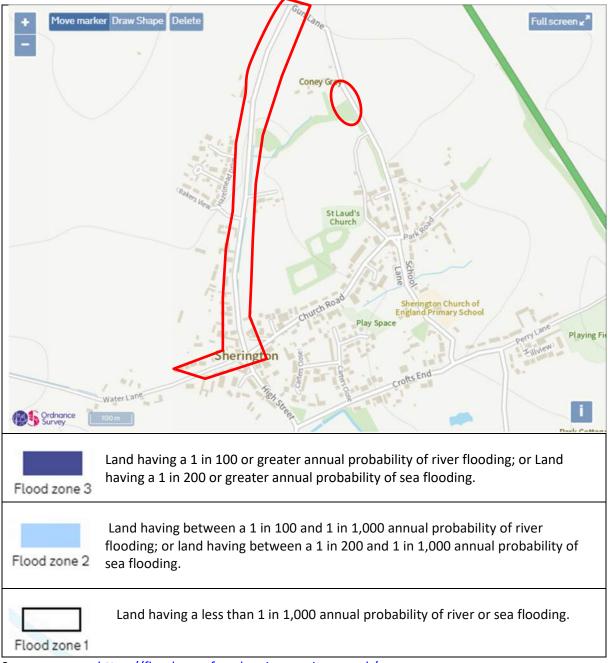

Source:

https://flood-map-for-planning.service.gov.uk/

© Environment Agency copyright and database rights 2021

5. **DRAINAGE SYSTEMS & WATERCOURSES**

5.1 Drainage Systems General

- 5.1.1.1 This section describes drainage systems and watercourses in direct proximity to the flood incident. The wider catchment is drained by numerous systems, all of which have some impact on the effective management of surface water flowing to and from the area of the flood incident.
- 5.1.1.2 If drainage systems are exceeded higher in the catchment, this would result in overland surface water flow which would follow the overall topography of the settlement's catchment. This leads to an increasing cumulative quantity of surface water flowing to areas lower in the catchment, which is beyond the capacity of drainage systems in that area.

5.2 Natural Watercourses

5.2.1 Open Watercourses

- 5.2.1.1 Gun Lane has a ditches and road drainage which ultimately drain to a watercourse on the western side of the carriageway which falls from east to west towards High Street.
- 5.2.1.2 On High Street a series of ditches, piped sections and culverts below crossings provide continuous surface water drainage into Sherington, along Water Lane and ultimately into the River Great Ouse.
- 5.2.1.3 On the eastern side of High Street there is a more or less continuous ditch, which is culverted at crossing points. To the north of Maryot Close within Sherington itself the watercourse is piped / culverted through to Water Lane. The ditch and culverts along this stretch of High Street are generally in need of some maintenance with capacity of the ditch having been reduced overtime by silt and vegetation growth. Photographs showing the typical condition of culverts are set out in Appendix C with a copy of a report prepared by residents / the Parish Council enclosed in Appendix D.
- 5.2.1.4 On the western side of High Street there are lengths of open ditch although for large portions there is either no ditch or it is culverted.

5.2.2 Buried Watercourses

5.2.2.1 Within Sherington south of Maryot Close all watercourses that were once open on High Street to the north are now culverted and are understood to untimely drain along Water Lane to the Great Ouse.

5.2.3 Structures

5.2.3.1 There are various culverts along High Street, no one structure appeared to be the cause of the flooding, however, many of the culverts are operating at a reduced capacity due to a build-up of silt.

5.3 Drainage Systems

5.3.1 Public Sewers

5.3.1.1 There are generally no surface water sewers on High Street to the north, however, to the south of Maryot Close there are public surface water sewers. Foul sewers are located in High Street to serve residential development to the northern extent of the village.

5.3.2 Highway Drainage

- 5.3.2.1 On Gun Lane there are various piped outlets from the carriageway and gullies. Similarly on High Street, there are various gullies and outlets from the highway to it is assumed the ditches which run adjacent to the carriageway.
- 5.3.2.2 Generally, from the evidence seen on site and evidence provided by the Parish Council the highway drainage is generally in an unmaintained state with evidence of blocked gullies and verge 'creep' where the surrounding soft landscaping has taken over / buried the highway drainage. Residents have taken their own action to expose some of the buried highway drainage which have been lost over the years.
- 5.3.2.3 Collection systems such as road gullies are normally provided to drain surface water from the public highway close to the system only, with no allowance for additional flow from private property or cumulative exceedance flows from higher areas of the catchment.
- 5.3.2.4 Modern highway drainage systems are designed to have capacity for the 1 in 5 annual exceedance probability event. Historic highway drainage systems that have become the responsibility of the Highway Authority due to dedication, as opposed to adoption, may not have been designed to any standard.
- 5.3.2.5 Highway drainage is required to remove water in normal wet weather conditions so that the carriageway is safe for vehicular traffic, and to reduce structural damage to pavements caused by water.

5.3.3 Private Drainage

- 5.3.3.1 Private residential properties have their own drainage systems to collect surface water and convey this to an outfall. These comprise roof gutters and downpipes, and gullies/channels for external areas.
- 5.3.3.2 The private drainage is expected to outfall to a variety of methods depending on their location within Sherington, upstream to the north this would be expected to outfall to the watercourse, further south where surface water sewers are available this is the most likely outfall for private properties.
- 5.3.3.3 Individual property owners are responsible for their drainage systems.

5.4 Flood Resilience

5.4.1 Community or Property Level Resilience Measures

5.4.1.1 We are not aware of any property or community level flood resilience measures that have been or are being introduced.

6. <u>DESCRIPTION OF FLOOD EVENT</u>

6.1 Rainfall and Flood Water

6.1.1 Rainfall

6.1.1.1 The rainfall described in Section 2 fell on the catchment from early afternoon around 13:00.

6.1.2 Direction of Surface Water Flow

6.1.2.1 A plan showing our understanding of the main flow routes during this event are enclosed in Appendix B.

Gun Lane

6.1.2.2 During the event ditches were full of surface water with ponding on the road. The highway was passable.

High Street

- 6.1.2.3 At the High Street / Gun Lane junction ditches were running full and water was on the carriageway. It was observed that there was agricultural runoff in this location. Also water was described as rising out of the verge and road gullies. On the western side of High Street south of Gun Lane there was no obvious ditch for collection of agricultural runoff.
- 6.1.2.4 Water was flowing towards Sherington in the south with water in the ditch(es) and on the carriageway along its whole length.
- 6.1.2.5 Debris collected at the trash screen by Harriets Close and was cleared by residents during the flood. At Water Lane the flood water followed the topography and flowed down Water Lane.
- 6.1.2.6 The max depth of flooding during the event was thought to be 300mm and the flood event lasted for around 3 to 4 hours.
- 6.1.2.7 One property on The Knoll had flooding within a standalone garage which has been converted for habitable use.
- 6.1.2.8 The ditch and highway drainage had inadequate capacity to accommodate the rainfall during this extreme event.
- 6.1.2.9 From reports the flooding would appear to have been caused by an excess of water on a saturated catchment which inundated the existing drainage system comprising highway drainage and ditches.

6.1.3 Standing Water

6.1.3.1 There were areas of standing water on low spots but generally the water was flowing southwards.

6.1.4 Drainage Systems

6.1.4.1 Sewers were not thought to have contributed to this flood event.

6.1.5 Specific Features That May Have Affected Water Flow

- 6.1.5.1 The upstream catchment is predominately rural, which as discussed above was saturated or nearly saturated as a result of higher than average rainfall from October. An intense rainfall event on the 23rd December result in significant rainfall on a catchment with limited or no capacity for infiltration.
- 6.1.5.2 The ditches and road drainage appear to have been neglected in terms of maintenance. It is not known whether or not the existing drainage would have been able to accommodate the flows during this event had the ditches and road gullies been operating to their full potential.
- 6.1.5.3 We have been advised that prior to the event that the flow control had not been fitted to the surface water drainage system for the Barwood Homes site located at land to the west of High Street, Sherington. This would have meant that water could leave the site with no flow control other than the downstream pipe acting as a flow limiter The outfall comprises a 150mm diameter pipe which would have limited the rate of discharge from the site to some extent. The Barwood Homes site is located downstream of where the flooding began.
- 6.1.5.4 It was also reported that there was sand in watercourses adjacent to the Barwood Homes site as a result of the development. Further that a road sweeper discharged into the ditch. Exact details are not known but these elements on their own are unlikely to have resulted in the flooding experienced on the 23rd December.

6.2 Response to Flooding

6.2.1 Immediate Response

6.2.1.1 It is understood that there wasn't a significant response., although residents acted to clear some areas of the drainage / watercourse network during the flood event.

6.2.2 Follow Up Response

6.2.2.1 MKC Flood and Water Management Team processed formal reports of flooding and instigated the Section 19 Flood Incident Investigation. Individual reports of the flood incident continued to be received by the LLFA over the following weeks.

7. CONCLUSION

- 7.1.1.1 The flooding of Sherington was caused by intense heavy rainfall over a relatively short period of time on a near saturated or saturated watercourse.
- 7.1.1.2 Flooding in High Street and Gun lane occurred due to a lack of capacity within the highway and ditch drainage network associated with both roads.
- 7.1.1.3 Rainfall during the event may have been in excess of the capacity of the ditch and or highway drainage but both elements appear to be requiring maintenance to bring them up to their full capacity.
- 7.1.1.4 The affected areas are shown to be at high risk of surface water flooding on published Long Term Flood Risk Mapping.
- 7.1.1.5 Residents affected by the flooding might consider implementing property level flood protection to limit the impact of future flood events.
- 7.1.1.6 The following are the Key Recommendations resulting from the flood incident:
 - Owners and/or occupiers of affected properties should consider preparing an Emergency Plan or Business Continuity Plan, and implementing Property Level Resilience.
 - With support from Flood Risk Management Authorities, the community should make efforts to:
 - o Appoint Community Flood Wardens,
 - o Prepare a Community Emergency Plan,
 - Explore options for funding and contributions for schemes to manage surface water and flood risk.

- The LLFA should continue to work with the community and Flood Risk Management Authorities. The work should:
 - Aim to manage surface water to provide a better standard of protection to Highway infrastructure, and the community.
 - Identify further surveys, investigations and studies required to locate and record existing drainage systems in the area of the flood incident and the wider catchment.
 - Identify all legal responsibilities for drainage and watercourse maintenance in the area of the flood incident and the wider catchment, reminding relevant parties of these responsibilities and the benefits of doing it.
 - o Identify further surveys, investigations and studies required to fully understand how the flooding occurred and the likelihood of it occurring again.
 - Assess the requirement and viability of engineering schemes to ensure the
 existing infrastructure operates as intended, and to provide a better standard
 of protection if required. This might include community level flood resilience
 measures, improving drainage to accommodate extreme rainfall events,
 providing attenuation storage areas and creating formal overland flood flow
 routes.
- Local Authorities, Emergency Services and other relevant response groups should continue to work together, and review their immediate and follow up response to the emergency.

8. RECOMMENDATIONS

8.1 General

- 8.1.1.1 Listed below are the recommended course of actions emanating from this formal Flood Investigation Report.
- 8.1.1.2 It is important to note that it is for the relevant responsible body or persons to assess each recommendation in terms of the legal obligation, resource implications, priority and cost/benefit analysis of undertaking such action.
- 8.1.1.3 The recommendations may be included within the Action Plan linked to the Local Flood Risk Management Strategy or in the relevant risk management authority's future work programmes, as appropriate.

8.2 Communities

(e.g. Town/Parish Council, Flood Forum, Community Groups, Resident and Business Associations, land owners and affected residents)

8.2.1.1 Recruit Community Flood Wardens to help coordinate the production of a Community Emergency and Flood Plan.

This can include:

- a plan of the community showing areas at risk of flooding, especially vulnerable properties and particularly vulnerable people (e.g. elderly, medical conditions, young families);
- a plan of the community outlining the ownership and maintenance regimes of drainage systems, with contact details to report any issues;
- a list of any improvements to existing drainage systems that are required.

This information should be used to inform the basis of preparing Household Emergency Plans for vulnerable properties in this area.

8.2.1.2 Regularly inspecting drainage systems in the area. Report blockages or other issues to the responsible owner and the LLFA.

Explore options for Property Level Resilience.

These measures can apply to single properties or larger systems that can be applied to protect multiple properties and communities.

- 8.2.1.3 Explore catchment wide solutions such as attenuation areas (balancing ponds), rain gardens, overflow routes and tree planting. https://flood-warning-information.service.gov.uk/long-term-flood-risk/map
- 8.2.1.4 Continue to report flood incidents to the LLFA. Endeavour to obtain as much evidence of flood events as possible, such as photographic and video evidence.
- 8.2.1.5 Property owners should undertake regular inspection and maintenance of their drainage systems in accordance with a defined maintenance regime. Property owners should assess the capacity of their drainage systems and identify any areas with insufficient capacity. Where this could lead to runoff to the public highway or nuisance to third party private property, improvement works should be considered.

8.3 Lead Local Flood Authority (LLFA)

- 8.3.1.1 Work with Flood Risk Management Authorities, riparian/property owners, the community and those affected by flooding. The work should:
 - Aim to manage surface water to provide a better standard of protection to Highway infrastructure, and the community.
 - Identify further surveys, investigations and studies required to locate and record existing drainage systems in the area of the flood incident and the wider catchment.
 - Identify all legal responsibilities for drainage and watercourse maintenance in the area of the flood incident and the wider catchment, reminding relevant parties of these responsibilities and the benefits of doing it.
 - o Identify further surveys, investigations and studies required to fully understand how the flooding occurred and the likelihood of it occurring again.
 - Assess the requirement and viability of engineering schemes to ensure the existing infrastructure operates as intended, and to provide a better standard of protection if required. This might include community level flood resilience measures, improving drainage to accommodate extreme rainfall events, providing attenuation storage areas and creating formal overland flood flow routes.
- 8.3.1.2 Work with the MKC Emergency Planning Team and the EA to support community based Flood Wardens, should they be recruited.
- 8.3.1.3 Work with the MKC Emergency Planning Team, the EA and other flood management authorities to support the community in the production of a Community/Household Emergency and Flood Plan and provide advice to residents and occupiers on how to explore options for property level resilience.

8.4 Highway Authority – Milton Keynes Highways

- 8.4.1.1 Undertake regular highway drainage cleansing throughout the catchment. Identify and develop a detailed plan of their assets to share with the LLFA and the community.
- 8.4.1.2 Consider more regular inspection and maintenance of highway drainage systems in areas identified as being at risk on the Surface Water Flood Risk Mapping, and where flooding has occurred.
- 8.4.1.3 Assess the capacity of their assets and identify any areas with insufficient capacity for draining normal runoff from the highway. Where this leads to flood risk to properties improvement works should be considered.
- 8.4.1.4 Assess the suitability of third-party drainage systems accepting discharge from Highway Drainage systems and report any unsatisfactory areas to the LLFA.
- 8.4.1.5 Assess the viability of works to provide overland flood flow routes from the highway to safe areas, to reduce reliance on drainage systems in extreme rainfall events.
- 8.4.1.6 Work with the LLFA and other parties with the work detailed in 9.3.1.1.
- 8.4.1.7 Assist the LLFA in publicising the Flood Toolkit information resource.

8.5 Developers

8.5.1.1 Developers should work with local authorities to ensure all development does not increase flood risk (from any source) to the site or adjacent land and is completed in accordance with approved plans, documents, and planning policy.

8.6 Environment Agency (EA)

- 8.6.1.1 Work with the MKC Emergency Planning Team and the LLFA to support the community and, should one be recruited, a community based Flood Warden.
- 8.6.1.2 Work with the LLFA and other parties with the work detailed in 9.3.1.1.
- 8.6.1.3 Assist the LLFA in publicising the Flood Toolkit information resource.

9. RIGHTS AND RESPONSIBILITIES

9.1 Communities

- 9.1.1.1 Communities may consist of the Town or Parish Council, a Flood Forum, Community Action Group, Resident and Business Associations, affected residents and land owners, amongst others.
- 9.1.1.2 Property owners who are aware that they are at risk of flooding should take action to ensure that they and their properties are protected.
- 9.1.1.3 Communities and residents, as property owners, have responsibility for their private drainage systems. They may have riparian responsibilities if their land boundary is next to a watercourse, a watercourse runs alongside their garden wall or hedge, and / or a watercourse runs through or underneath their land.
- 9.1.1.4 Community resilience is important in providing information and support to each other if flooding is anticipated. Actions taken can include subscribing to MET Office email alerts for weather warnings, signing up to the Flood Warning Direct service for river flood warnings, supporting a Community Flood Warden, producing a Community Emergency and Flood Plan, implementing property level resilience and moving valuable items to higher ground.

9.2 Lead Local Flood Authority (LLFA)

- 9.2.1.1 As stated within the introduction section, the LLFA has a responsibility to investigate flood incidents under Section 19 of the F&WMA.
- 9.2.1.2 The LLFA also has a responsibility to maintain a register of assets which have a significant effect on flooding from surface runoff, groundwater or ordinary watercourses (non-Main River) as detailed within Section 21 of the F&WMA.
- 9.2.1.3 The register must contain a record about each structure or feature, including the ownership and state of repair. The LLFA is also required to keep a record of flooding hotspots across the county.
- 9.2.1.4 As the responsible LLFA for the affected properties in Milton Keynes, MKC will be looking for support from other risk management authorities, communities and individual home owners to ensure flood incidents are reported, and any assets which have a significant effect on flood risk are recorded on the asset register.

9.2.1.5 While MKC can suggest possible causes of flooding, and make recommendations to ensure flood risk is mitigated as far as possible, the F&WMA does not provide MKC with the mandate or funding to act on identified causes of flooding or force risk management authorities to undertake any recommended actions.

9.3 Highway Authority – Milton Keynes Council

- 9.3.1.1 Highway Authorities have a duty to maintain the highway under Section 41 of the Highway Act 1980 but subject to the special defence in Section 58.
- 9.3.1.2 New highway drainage systems are designed to Highways England's Design Manual for Roads and Bridges (Volume 4, Section 2). They are only required to be constructed to drain surface water run-off from within the highway catchment rather than from the wider catchment.
- 9.3.1.3 There are historic drainage systems in historic highways which can become the responsibility of the Highway Authority due to dedication, as opposed to adoption. These drainage systems may not have been designed to any standard.

9.4 Water Company (Anglian Water) (AW)

- 9.4.1.1 Water and sewerage companies are responsible for managing the risks of flooding from surface water, foul water or combined sewer systems. Public sewers are designed to protect properties from the risk of flooding in normal wet weather conditions. However, in extreme weather conditions there is a risk that sewer systems can become overwhelmed and result in sewer flooding.
- 9.4.1.2 Since October 2011, under the 'Private Sewer Transfer', AWS adopted piped systems on private land that serve more than one curtilage and were connected to a public sewer on 1st July 2011. Sewerage Undertakers have a duty, under Section 94 of the Water Industry Act 1991, to provide sewers for the drainage of buildings and associated paved areas within property boundaries.
- 9.4.1.3 Sewerage Undertakers are responsible for public sewers and lateral drains. A public sewer is a conduit, normally a pipe that is vested in a Water and Sewerage Company or predecessor, that drains two or more properties and conveys foul, surface water or combined sewage from one point to another, and discharges via a positive outfall.
- 9.4.1.4 There is no automatic right of connection for other sources of drainage to the public sewer network. Connection is therefore discretionary following an application to connect.

9.5 Land Owners and Developers

- 9.5.1.1 Land owners must let water flow through their land without any obstruction, pollution or diversion which affects the rights of others. Others also have the right to receive water in its natural quantity and quality. All riparian owners have the same rights and responsibilities.
- 9.5.1.2 Land owners must accept flood flows through their land, even if these are caused by inadequate capacity downstream. Legally, owners of lower-level ground have to accept natural land drainage from adjacent land at a higher level. The exception to this is where the owner of the higher level land has carried out "improvements" such that the run-off from the land cannot be considered "natural".

9.5.1.3 Land owners must keep any structures, such as culverts, trash screens, weirs, dams and mill gates, clear of debris.

These rights and responsibilities are summarised in the Government guidance – Owning a Watercourse:

https://www.gov.uk/guidance/owning-a-watercourse

9.5.1.4 Land owners and developers are responsible for working with the Local Planning Authority to ensure that their development is completed in accordance with the planning permission and all conditions that have been imposed.

9.6 Environment Agency (EA)

- 9.6.1.1 The EA has a strategic overview responsibility of all sources of flooding and coastal erosion under the F&WMA.
- 9.6.1.2 The responsibility for maintenance and repair of Main Rivers lies with the riparian owner, but the EA have permissive powers to carry out maintenance work on Main Rivers under Section 165 of the Water Resources Act 1991 (WRA).
- 9.6.1.3 Main River means all watercourses shown as such on the statutory Main River maps held by the EA and the Department of Environment, Food and Rural Affairs, and can include any structure or appliance for controlling or regulating the flow of water into, in or out of the channel.
- 9.6.1.4 The nearest Main River is Great Ouse. This was not a factor in the flood incident.
- 9.6.1.5 The EA will encourage third party asset owners to maintain their property in appropriate condition and take enforcement action where it is appropriate. They may consider undertaking maintenance or repair of third party assets only where it can be justified in order to safeguard the public interest and where other options are not appropriate.
- 9.6.1.6 Other work carried out by the EA includes:
 - Working in partnership with the Met Office to provide flood forecasts and warnings.
 - Developing long-term approaches to Flood and Coastal Erosion Risk Management (FCERM). This includes working with others to prepare and carry out sustainable Flood Risk Management Plans (FRMPs). FRMPs address flood risk in each river catchment. The EA also collates and reviews assessments, maps and plans for local flood risk management (normally undertaken by LLFAs).
 - Providing evidence and advice to support others. This includes national flood and coastal erosion risk information, data and tools to help other risk management authorities and inform Government policy, and advice on planning and development issues. The EA are statutory consultees of the Local Planning Authority.
 - Working with others to share knowledge and the best ways of working. This includes work to develop FCERM skills and resources.
 - Monitoring and reporting on FCERM. This includes reporting on how the national FCERM strategy is having an impact across the country.

DISCLAIMER

This report has been prepared as part of Milton Keynes Council's responsibilities under the Flood and Water Management Act 2010. It is intended to provide context and information to support the delivery of the Local Flood Risk Management Strategy and should not be used for any other purpose.

The findings of the report are based on a subjective assessment of the information available by those undertaking the investigation and therefore may not include all relevant information. As such it should not be considered as a definitive assessment of all factors that may have triggered or contributed to the flood event.

Any recommended actions outlined in this FIR will be for the relevant responsible body or persons to assess in terms of resource implications, priority and cost/benefit analysis of the proposal. Moving forward, these may be included in the Action Plan linked to the Local Flood Risk Management Strategy or in the relevant risk management authority's future work programme as appropriate.

The opinions, conclusions and any recommendations in this report are based on assumptions made by David Smith Associates and Milton Keynes County Council when preparing this report, including, but not limited to those key assumptions noted in the report, including reliance on information provided by others.

David Smith Associates and Milton Keynes Council expressly disclaim responsibility for any error in, or omission from, this report arising from or in connection with any of the assumptions being incorrect.

The opinions, conclusions and any recommendations in this report are based on conditions encountered and information reviewed at the time of preparation and David Smith Associates and Milton Keynes Council expressly disclaim responsibility for any error in, or omission from, this report arising from or in connection with those opinions, conclusions and any recommendations.

The implications for producing Flood Investigation Reports and any consequences of blight have been considered. The process of gaining insurance for a property and/or purchasing/selling a property and any flooding issues identified are considered a separate and legally binding process placed upon property owners and this is independent of and does not relate to the County Council highlighting flooding to properties at a street level.

David Smith Associates and Milton Keynes Council do not accept any liability for the use of this report or its contents by any third party.

ACRONYMS

LLFA Lead Local Flood Authority

EA Environment Agency
MKC Milton Keynes Council

AW Anglian Water

FIR Flood Investigation Report

F&WMA Flood and Water Management Act 2010

LDA Land Drainage Act 1991 WRA Water Resources Act 1991

USEFUL LINKS

Highways Act 1980:

http://www.legislation.gov.uk/ukpga/1980/66/contents

Water Resources Act 1991:

http://www.legislation.gov.uk/ukpga/1991/57/contents

Land Drainage Act 1991:

http://www.legislation.gov.uk/ukpga/1991/59/contents

Gov.UK Guidance – Owning a Watercourse:

Your responsibilities and rules to follow for watercourses on or near your property, and permissions you need to do work around them.

https://www.gov.uk/guidance/owning-a-watercourse

EA - Prepare your Property for Flooding:

How to reduce flood damage Flood protection products and services https://www.gov.uk/government/publications/prepare-your-property-for-flooding

Flood and Water Management Act 2010

http://www.legislation.gov.uk/ukpga/2010/29/contents

USEFUL CONTACTS

Milton Keynes Council

Highways:

Tel: 01908 252353

Website: https://www.milton-keynes.gov.uk/highways-and-transport-hub/report-it-highways-and-

transport/report-problems-on-roads-footways-and-redways

Email: customerservices@milton-keynes.gov.uk

Emergency Planning:

Tel: 01908 311773

Website: https://www.milton-keynes.gov.uk/environmental-health-and-trading-

standards/emergency-planning

Email: emergencyplanning@milton-keynes.gov.uk

Flood and Water Management Team:

Tel: 01908 691691 (Mon-Fri, 9am - 5pm)

Email: Ilfa@milton-keynes.gov.uk

Environment Agency

General Tel: 08708 506 506 (Mon-Fri 8-6) Call charges apply.

Incident Hotline: 0800 807060 (24 hrs)

Floodline: 0345 988 1188

Website: https://www.gov.uk/government/organisations/environment-agency

Email: enquiries@environment-agency.gov.uk

Anglian Water

Emergency Tel: 03457 145145 (select option 1)

Website:

http://www.anglianwater.co.uk/household/water-recycling-services/sewers-and-drains.aspx

APPENDIX A

Environment Agency Rainfall Catchment Analysis



December 2020 Flooding

Creen Ouse establishment

This factsheet presents rainfall data in the lead up to and on 23rd December 2020 and the subsequent river response.

Long Term Average (LTA) rainfall

The LTA is the arithmetic mean calculated from historic records. December was a very wet month with a total average rainfall of 108 mm (195% of the LTA) across East Anglia. December 2020 was the second wettest December in this area since the record started in 1981.

Even with a relatively dry November, the 3 months from October - December rainfall was 154% of the LTA. Figure 1 shows the surplus of rainfall seen in October, December and then January.

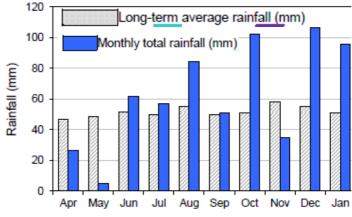


Figure 1: LTA vs 2020 observed rainfall

Over 2020, rainfall across the area was 115% of the LTA (Figure 1). The consistently above average rainfall in the

months ahead of the main flood contributed to the catchment response on the 23rd December.

Soil Moisture Deficit (SMD)

SMD is the difference between the amount of water actually in the soil and the amount of water the soil can hold, expressed in depth of water (mm). This is an indication of how saturated the ground is. A low SMD means heavy rainfall is less likely to infiltrate the ground and more likely to run off into watercourses. The

impact of the excess rainfall shown in Figure 1 was an average SMD across the East of 3mm at the end of December. Statistically this is 'below normal' and an indication of how wet the catchment was.

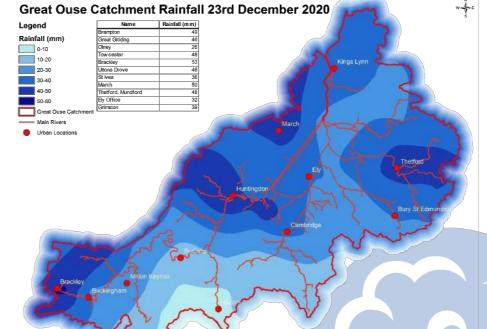


Figure 2: Rainfall distribution on 23rd December 2020

Event Rainfall

Up to 17mm fell across the catchment in the 3 days prior to the flood event, this filled the majority of remaining storage space, effectively saturating the catchment ahead of Storm Bella arriving on Wednesday 23rd December.

Figure 2 indicates the distribution of rainfall which fell across the Great Ouse catchment on December 23rd 2020, along with spot totals. Much of the rainfall was in the afternoon of the 23rd, rather

than over the course of the day. This intensity of rainfall contributed to the fast reaction of watercourses. The December LTA of 55mm shows that almost a month's rainfall was seen in certain locations on the 23rd.

River Levels

The most significant river levels were seen on the River Great Ouse, the Tove, Kym, Alconbury Brook and Bury Brook.

The high degree of saturation within the catchment and the rainfall in the days preceding the 23rd December contributed to higher inchannel levels, taking up any spare storage within the system. This culminated in a very high runoff from the 23rd December rainfall and significant flooding from fluvial, surface water and groundwater sources.

The most significant flood event of this scale prior to December 2020 was the 1998 flood event. For the Great Ouse, this is often the benchmark by which other floods are measured and compared.

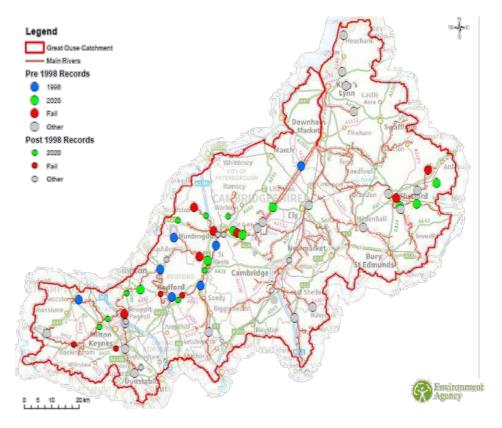


Figure 3: Year of highest recorded gauge level. 'Fail' indicates the gauge did not record an accurate level during the December 2020

Figure 3 shows a number of river level gauges in the Great Ouse catchment. The map shows that following the 23rd December rainfall, several gauges recorded river levels exceeding those of 1998 and are the highest level on record. The river response reflects the severity of rainfall.

Flood Frequency Analysis

The likelihood of flood events are often expressed in terms 'Annual Exceedance Probability' (AEP), i.e. an event of X size has Y% probability of being exceeded each year, although this figure will vary from location to location. It is possible to calculate the AEP of December's flooding, determining how often you would expect to see this size event based on the historic record. The work to calculate this is ongoing.

Summary

The widespread flooding impacts seen on and after 23rd December 2020 were as a consequence of heavy rainfall on December 23rd, falling on an already wet catchment which was especially sensitive to intense rainfall. The LTA shows that the rainfall experienced was exceptionally high in December. The rainfall in the 3 days preceding the 23rd December also contributed to the severity of the event.


The Environment Agency are continuing to collect and process data related to the December flooding and subsequent impacts. Asset inspections are underway and any subsequent work being scoped. The performance of the flood warning service is being reviewed and we are working with a number of communities to help them increase their resilience to flooding.


Our monthly water situation reports and weekly rainfall and river flow reports are published online at:

https://www.gov.uk/government/collections/water-situation-reports-for-england

APPENDIX B

Flood Incident Plan

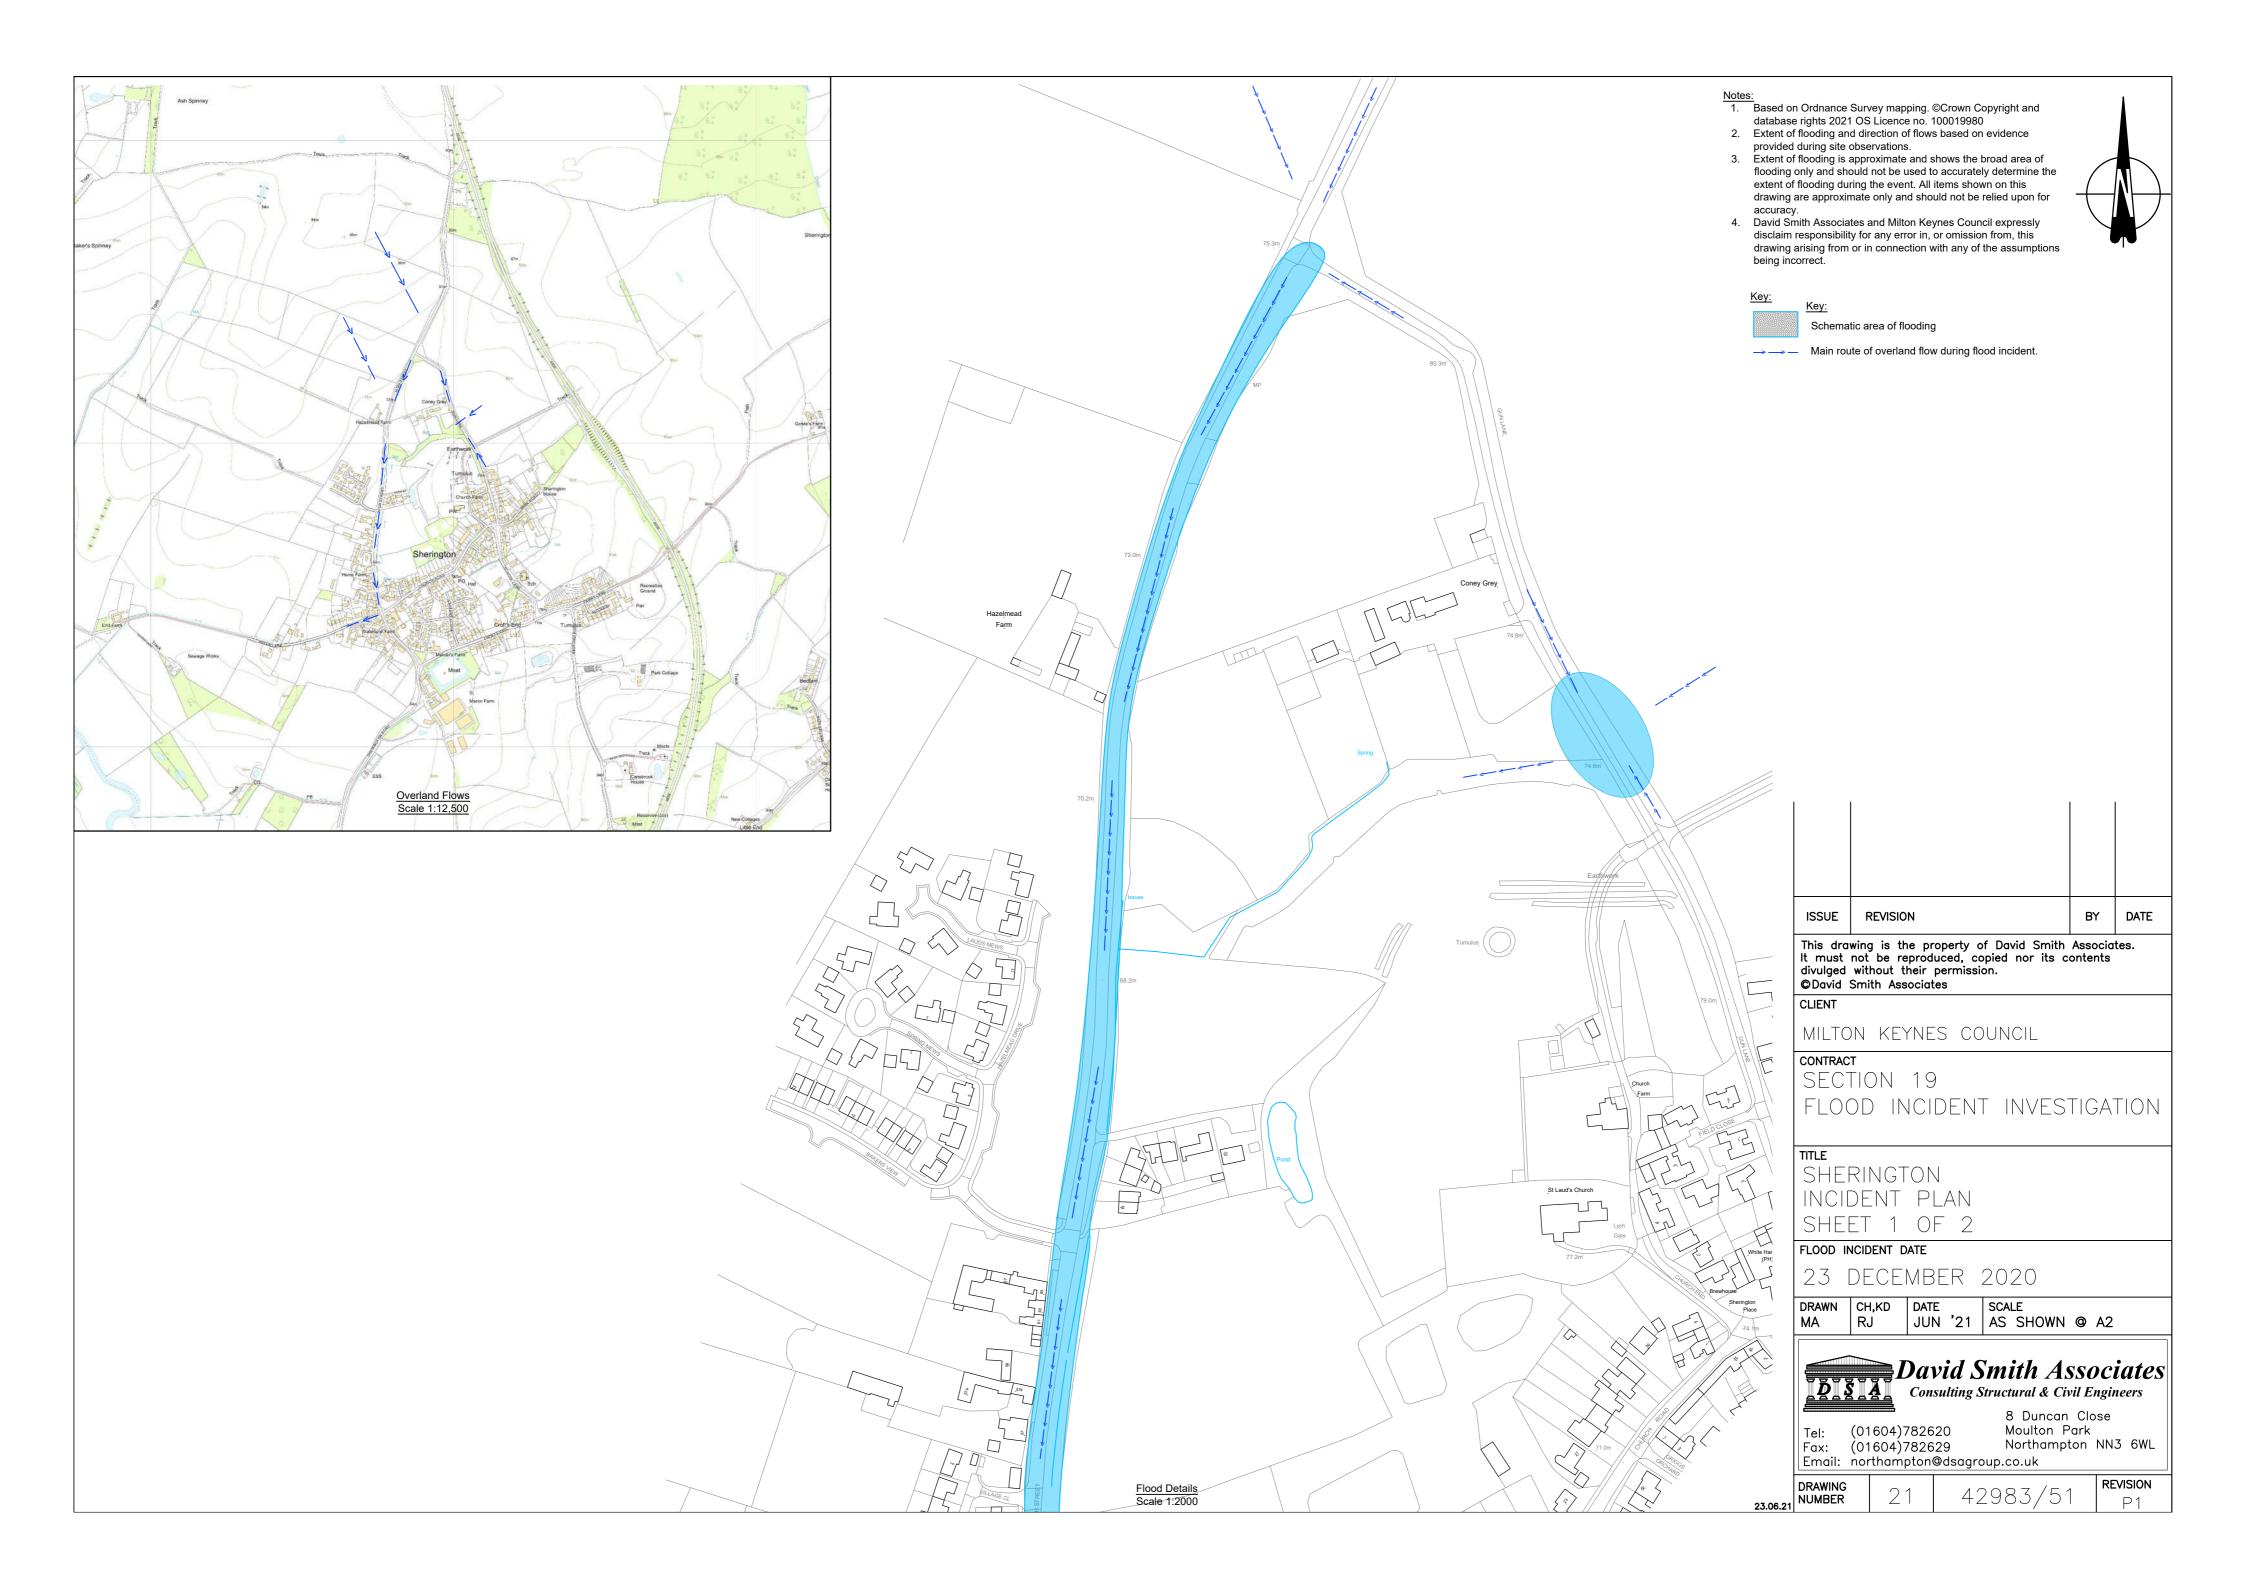

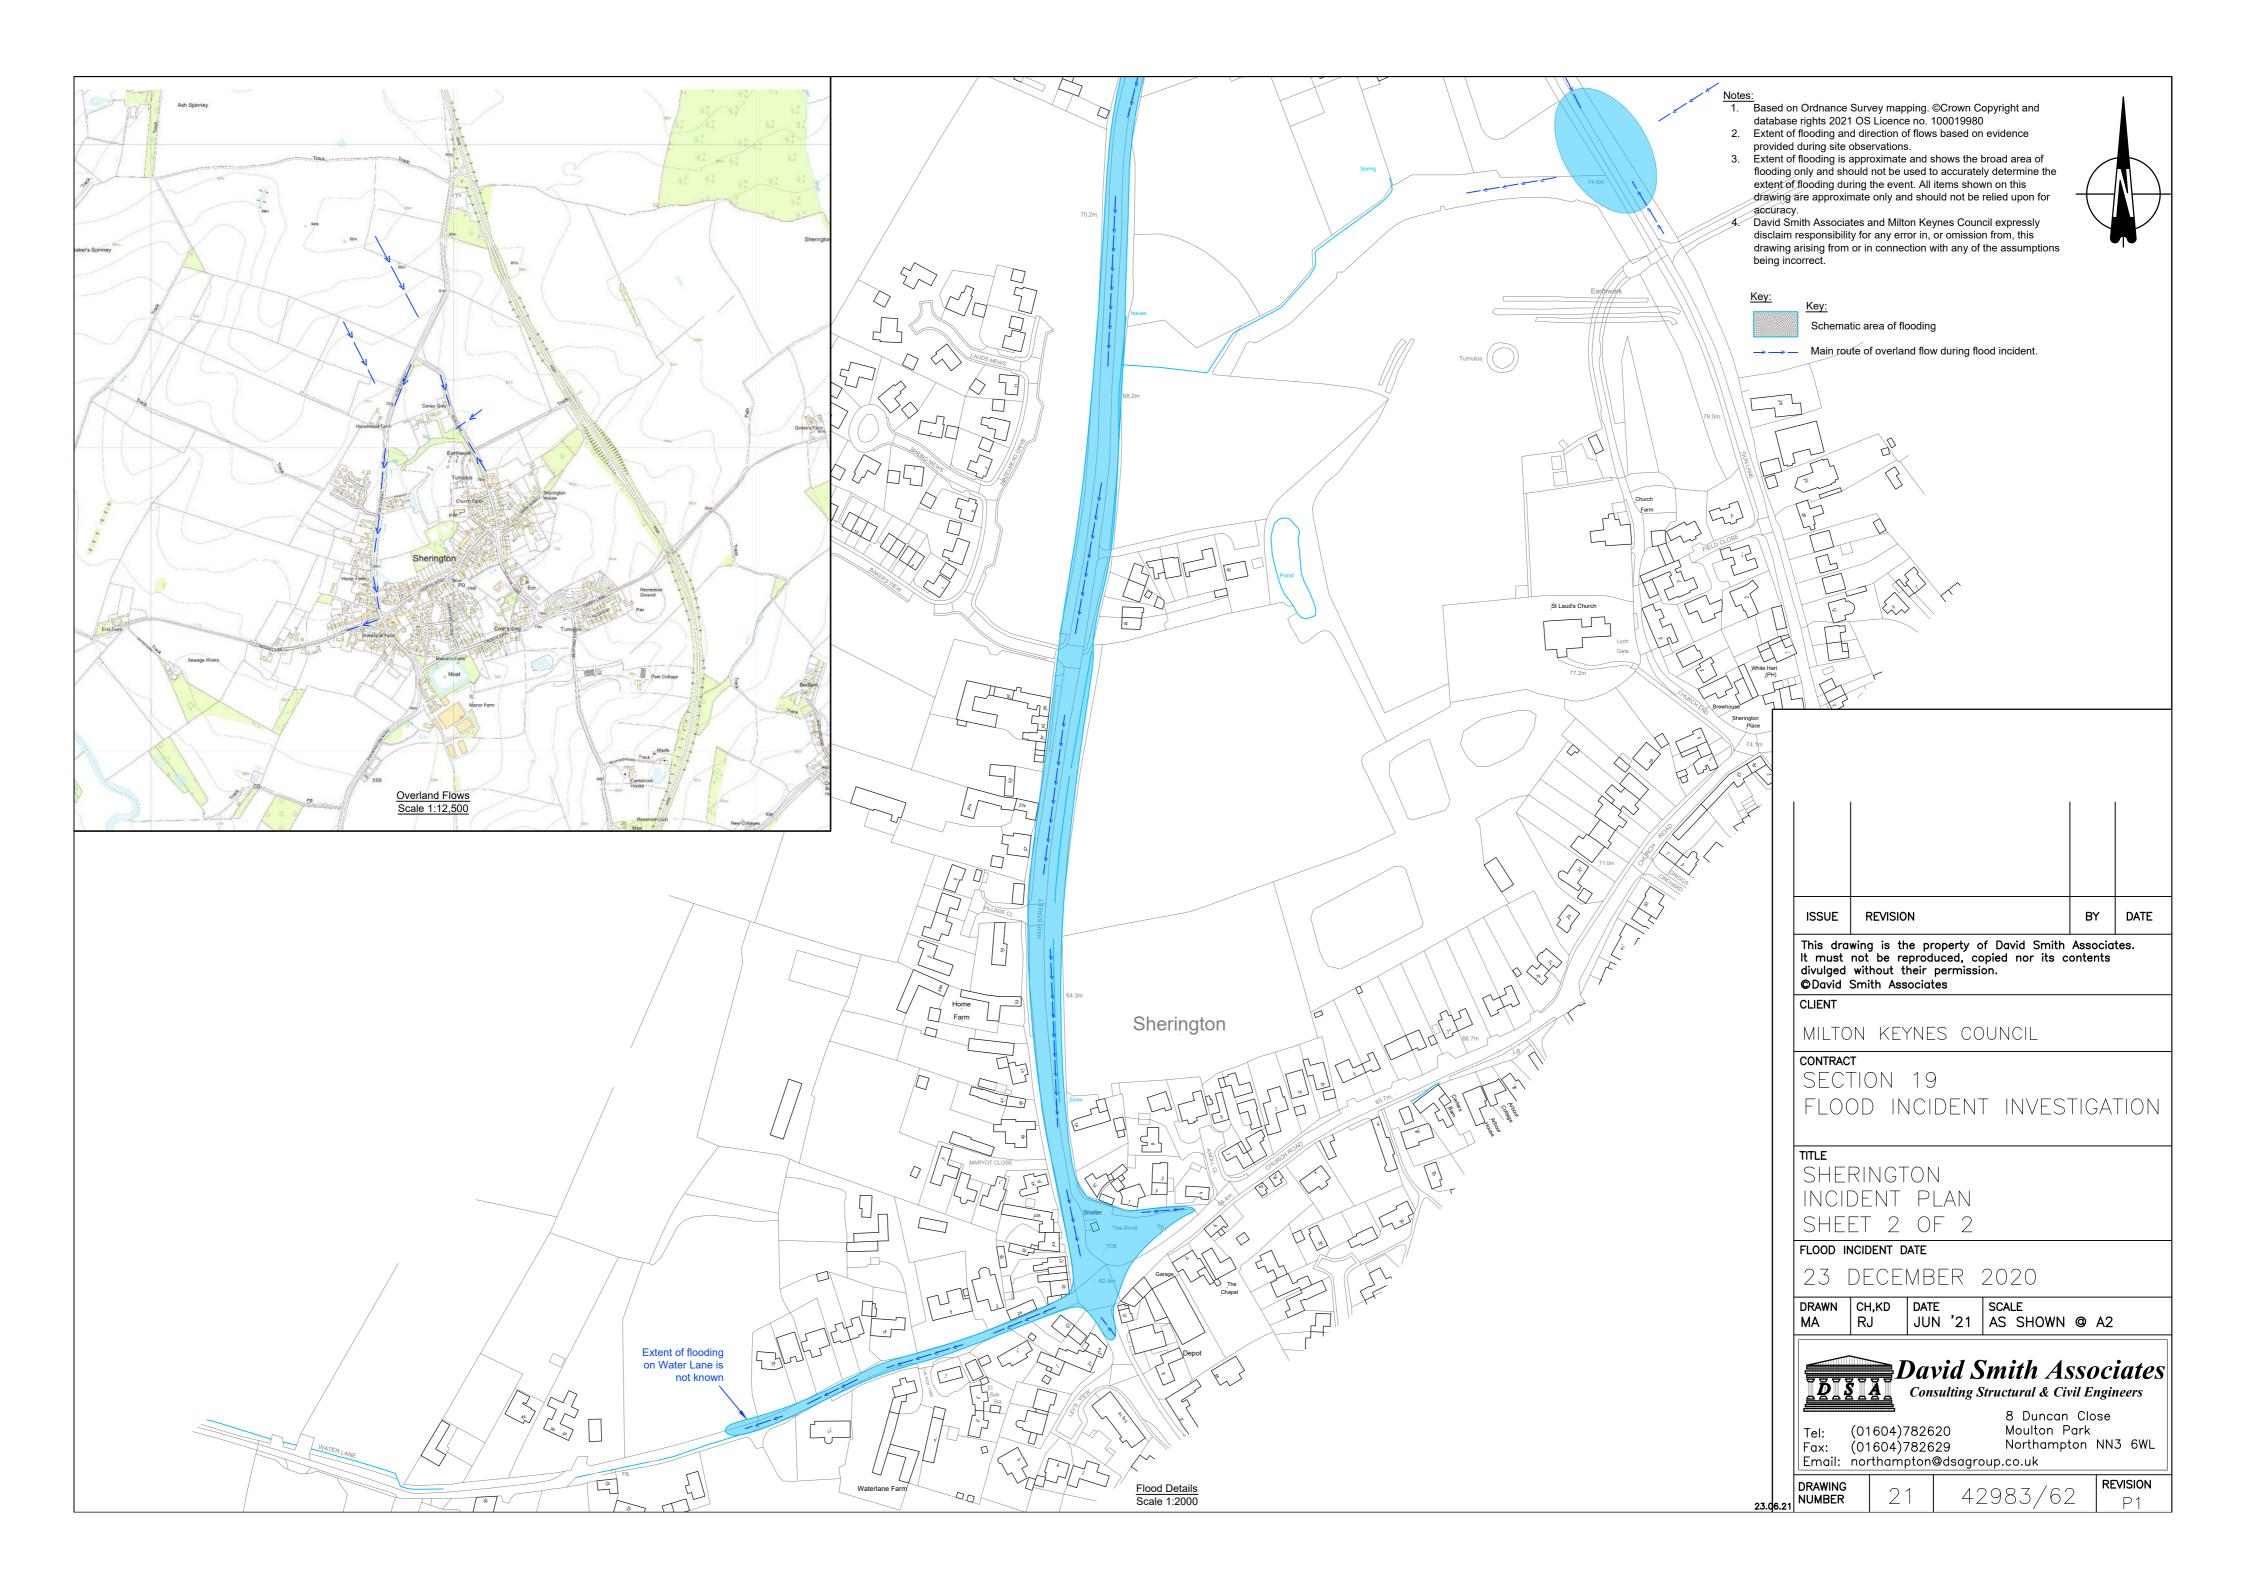

APPENDIX C

Photographs

Various photographs of the flood incident area taken by the Investigating Officer

Figure 1: Gun Lane Road Drainage – kept clear by residents



Figure 2 Ditch 2: Gun Lane Gully



Figure 3: Culvert on High Street under Gun Lane



Figure 4: Culvert on west side of High Street near Gun Lane



Figure 5: Example of Gully on High Street – some of these features have been cleared by residents



Figure 6: Silted Culvert on High Street



Figure 7: High Street Ditch with Standing Water



Figure 8: High Street Road Drainage

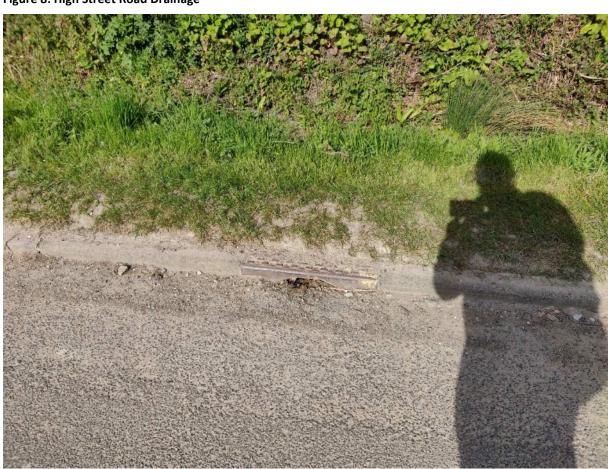


Figure 9: High Street Ditch with Standing Water

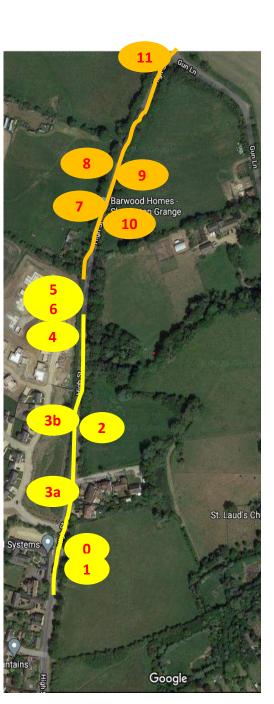


Figure 10: High Street Ditch partially blocked with Silt



APPENDIX D

Drainage Project – Report By Resident



29th December Drainage Project

Sherington High Street to Gun Lane

To be followed up with Anglian Water / MKC / Barwoods

0 West-> East Sand and Gravel in Run-off from High Street New Development

1 East Sand and Gravel in ditches – down stream of New Development

2 East Recovered Drain on original road – overgrown vegetation

3 West Overgrown ditches – non functioning properly4 West Rubbish recovered from partially blocked drain

5 West Run Off from New Development Pt 2 (direct to ditch) – high sand content

6 West Run Off from New Development Pt 2 (direct to ditch) – high sand content

To be followed up with MKC

7 West Recovered Drains and Kerbside on original road – overgrown vegetation

8 West Recovered Drains on original road – overgrown vegetation

9 East Recovered Drains and cleared runout

10 East Wheel & Tyre Assembly in the ditch (2 off)

11 West Recovered Drain and Kerbside on original road – overgrown vegetation





High St East Adjacent to site Sand in drainage tunnel to ditch



High St East Adjacent to site Sand in drainage tunnel to west (site)



High St East Adjacent to site Sand in drainage tunnel






High St East Sand in ditch





High St East – recovered drain – note overgrown vegetation (>300mm)

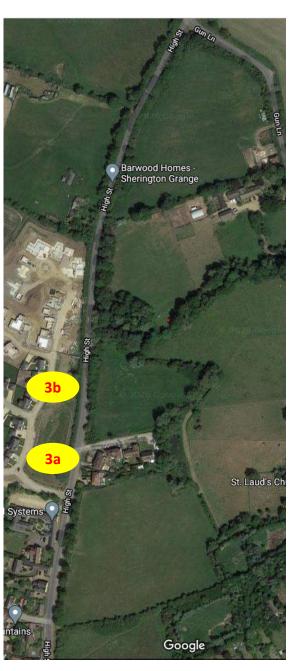



High St West North Overgrown ditch (New Estate)



High St West South Overgrown ditch (New Estate)





Rubbish removed on 24th Dec

High St West Partially Blocked Drain (New Estate)





High St West

RED LINE indicates the channel cut to force the site run-off into the ditch

Runs as far as partially blocked culvert – and partly transfers onto the road



High St West Water channel from site



High St West Sand in ditch from site





High St West Recovered Drain Recovered Kerbside Road Loss to overgrown vegetation



High St West Recovered Drain



High St West Recovered Kerbside Road Loss to overgrown vegetation



High St West Recovered Drain Road Loss to overgrown vegetation










High St West Recovered Drain Road Loss to overgrown vegetation



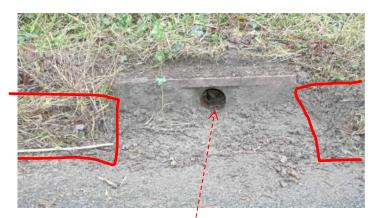

High St East Cleared kerb drain Vegetation overgrown





High St East Cleared Run off





High St East Tires blocking ditch





High St West Recovered Kerbside Recovered Road Drain Overgrown Vegetation



APPENDIX E

Environment Agency Standard Notice

Open Government Licence for public sector information

You are encouraged to use and re-use the Information that is available under this licence freely and flexibly, with only a few conditions.

Using Information under this licence

Use of copyright and database right material expressly made available under this licence (the 'Information') indicates your acceptance of the terms and conditions below.

The Licensor grants you a worldwide, royalty-free, perpetual, non-exclusive licence to use the Information subject to the conditions below.

This licence does not affect your freedom under fair dealing or fair use or any other copyright or database right exceptions and limitations.

You are free to:

- copy, publish, distribute and transmit the Information;
- adapt the Information;
- exploit the Information commercially and non-commercially for example, by combining it with other Information, or by including it in your own product or application.

You must (where you do any of the above):

• acknowledge the source of the Information in your product or application by including or linking to any attribution statement specified by the Information Provider(s) and, where possible, provide a link to this licence;

If the Information Provider does not provide a specific attribution statement, you must use the following:

Contains public sector information licensed under the Open Government Licence v3.0.

If you are using Information from several Information Providers and listing multiple attributions is not practical in your product or application, you may include a URL or hyperlink to a resource that contains the required attribution statements.

These are important conditions of this licence and if you fail to comply with them the rights granted to you under this licence, or any similar licence granted by the Licensor, will end automatically.

Exemptions

This licence does not cover:

- personal data in the Information;
- Information that has not been accessed by way of publication or disclosure under information access legislation (including the Freedom of Information Acts for the UK and Scotland) by or with the consent of the Information Provider;
- departmental or public sector organisation logos, crests and the Royal Arms except where they form an integral part of a
 document or dataset;
- military insignia;
- third party rights the Information Provider is not authorised to license;
- other intellectual property rights, including patents, trade marks, and design rights; and identity documents such as the British Passport

Non-endorsement

This licence does not grant you any right to use the Information in a way that suggests any official status or that the Information Provider and/or Licensor endorse you or your use of the Information.

No warranty

The Information is licensed 'as is' and the Information Provider and/or Licensor excludes all representations, warranties, obligations and liabilities in relation to the Information to the maximum extent permitted by law.

The Information Provider and/or Licensor are not liable for any errors or omissions in the Information and shall not be liable for any loss, injury or damage of any kind caused by its use. The Information Provider does not guarantee the continued supply of the Information.

Governing Law

This licence is governed by the laws of the jurisdiction in which the Information Provider has its principal place of business, unless otherwise specified by the Information Provider.

Definitions

In this licence, the terms below have the following meanings:

'Information' means information protected by copyright or by database right (for example, literary and artistic works, content, data and source code) offered for use under the terms of this licence.

'Information Provider' means the person or organisation providing the Information under this licence.

'Licensor' means any Information Provider which has the authority to offer Information under the terms of this licence or the Controller of Her Majesty's Stationery Office, who has the authority to offer Information subject to Crown copyright and Crown database rights and Information subject to copyright and database right that has been assigned to or acquired by the Crown, under the terms of this licence.

'Use' means doing any act which is restricted by copyright or database right, whether in the original medium or in any other medium, and includes without limitation distributing, copying, adapting, modifying as may be technically necessary to use it in a different mode or format.

'You', 'you' and 'your' means the natural or legal person, or body of persons corporate or incorporate, acquiring rights in the Information (whether the Information is obtained directly from the Licensor or otherwise) under this licence.

About the Open Government Licence

The Controller of Her Majesty's Stationery Office (HMSO) has developed this licence as a tool to enable Information Providers in the public sector to license the use and re-use of their Information under a common open licence. The Controller invites public sector bodies owning their own copyright and database rights to permit the use of their Information under this licence.

The Controller of HMSO has authority to license Information subject to copyright and database right owned by the Crown. The extent of the Controller's offer to license this Information under the terms of this licence is set out in the <u>UK Government Licensing Framework</u>.

This is version 3.0 of the Open Government Licence. The Controller of HMSO may, from time to time, issue new versions of the Open Government Licence. If you are already using Information under a previous version of the Open Government Licence, the terms of that licence will continue to apply.

These terms are compatible with the Creative Commons Attribution License 4.0 and the Open Data Commons Attribution License, both of which license copyright and database rights. This means that when the Information is adapted and licensed under either of those licences, you automatically satisfy the conditions of the OGL when you comply with the other licence. The OGLv3.0 is Open Definition compliant.

Further context, best practice and guidance can be found in the <u>UK Government Licensing Framework</u> section on The National Archives website.